

Quick Guide

Clearview Secondary Glazing

clearviewsg.co.uk



Timber Sub-frame (Recommended)

This is pre-bonded to the aluminium main frame and included in the build sizes. Enables adjustability onsite to fit and notch around lumps, bumps, and cables. This is the surface the perimeter trim is attached to seal off & hide gaps around the frame




Standard Sub-Frame
Example 43mm x 16mm

Refer to the product guides for specific details



XL Sub-Frame: (Extra Long)
Example 62mm x 16mm

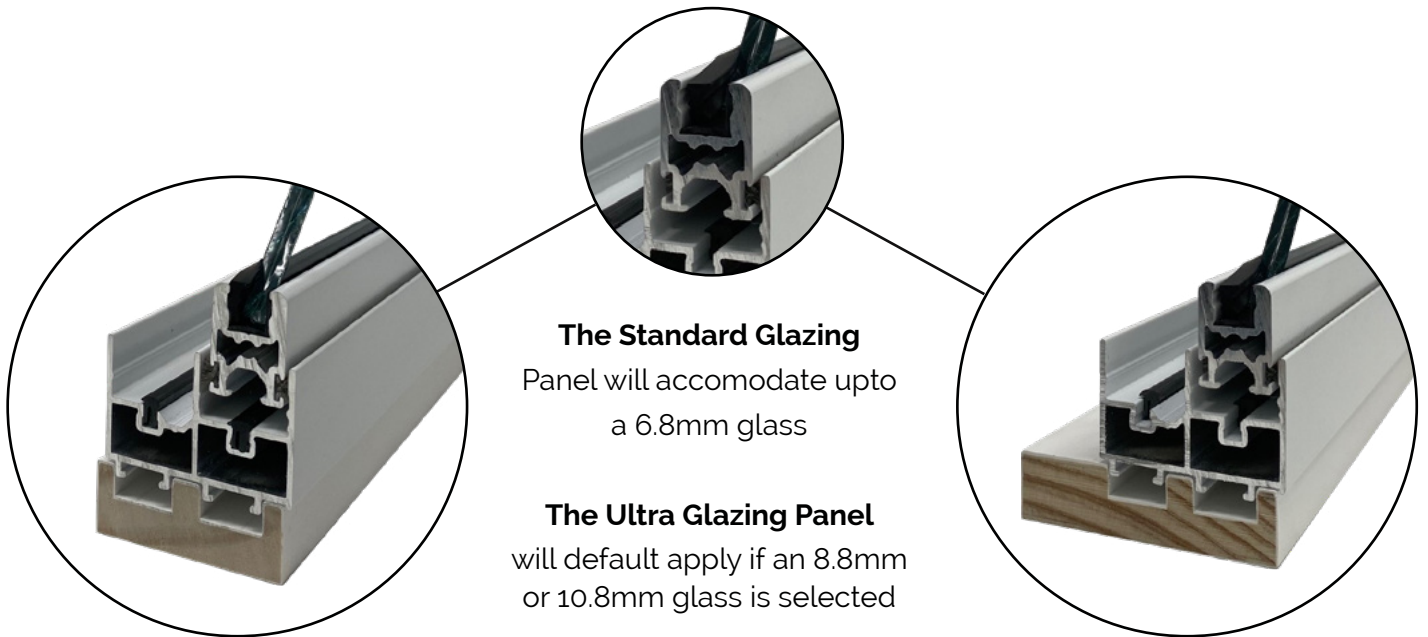


Frame Fixing Options



Face Fixed

In the Reveal fixed to the Primary window Frame

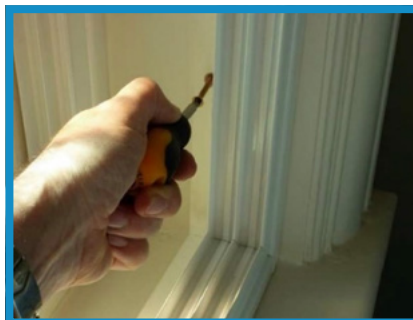

Reveal Fixed

Fixed to the side Walls, Sill & Top inside the reveal (example XL Frame)




Surface Fixed


Face Fixed around the window reveal to the internal wall

Reveal Fix - Track Drilled

Side, Top & Bottom Fixing through the aluminium track.
Drilled by the customer / installer onsite using
a tool supplied with the unit.

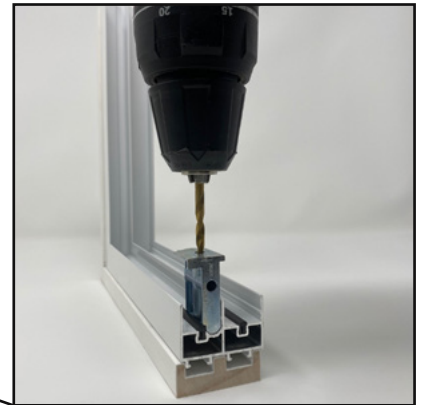

Face Fix
Front to Back Fixing
Factory pre-drilled

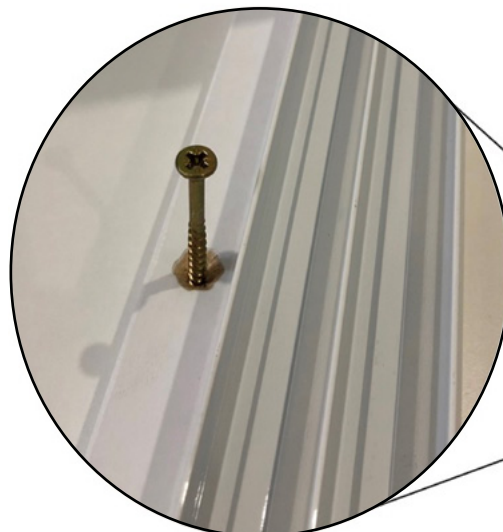

**Reveal Fix
XL Frame Drilled**
Side, Top & Bottom Fixing
through the timber sub-frame
Factory pre-drilled



Trimming

Perimeter sealing & finishing, hiding gaps and inaccuracies between the wall and frame.

20mm x 6mm Trim supplied as standard for the front face of the units.

Alternative sizes available as an optional extra.

