

Specification

Aluminium 6063-T6 alloy to BS EN 755-9 standard, powder coated to BS 6496 to 60 – 80 micron finish.

Aluminium Finish: White – RAL 9003 Satin.

Sub-Frame: Primed high quality with 2 coats, FSC Mix credit radiata pine clear grade, FSC mix credit TT-COC-002 157.

Timber Size: 62mm x 16mm.



Glazing: All frames are factory glazed.

Gasket colour: White.

Trim: 27mm uPVC Single Bullnosed White.

Ironmongery: Non-Locking as standard or a Locking option.

In line with our company policy of continuous product development and improvement, Clearview reserves the right to make minor alterations to specification without notice.

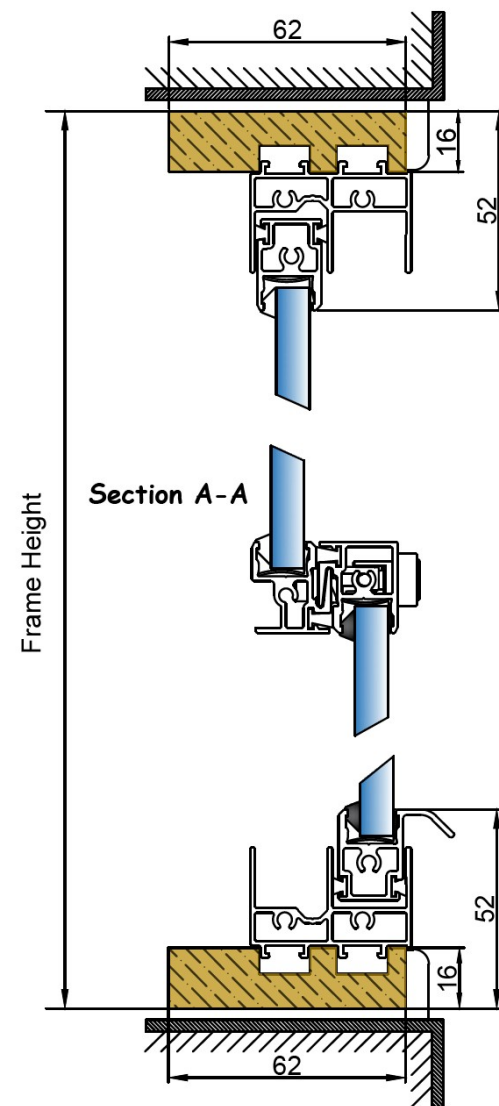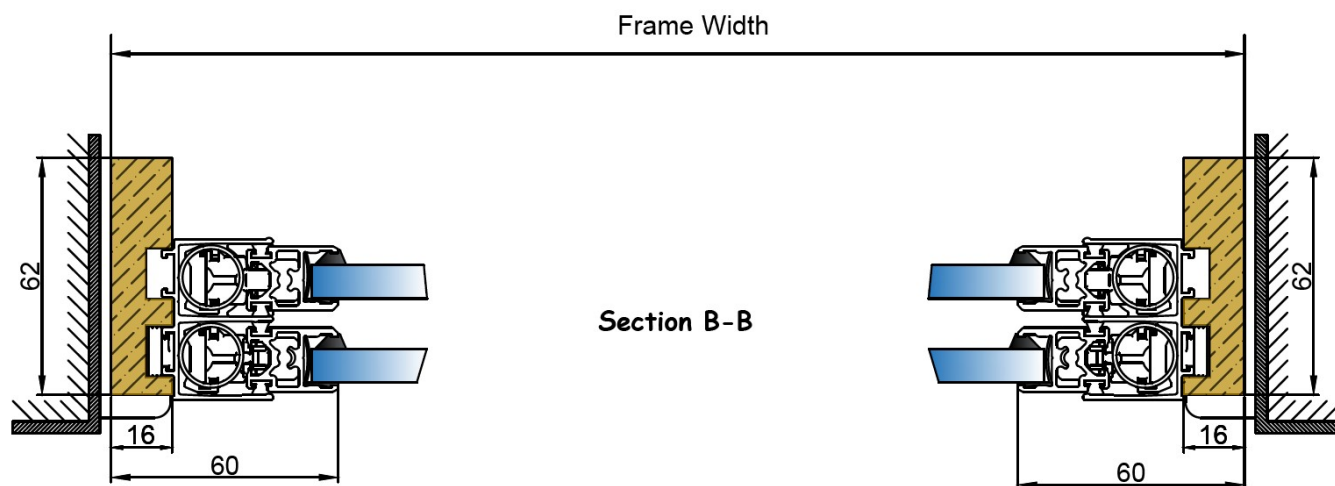

PROJECT:

Vision Balanced Vertical Slider Glide Ultra XL (Full slide past panels)

GSG_001

DRAWING NO.

-

PROJECT NO.

07/07/21

DATE.

TITLE:

BVSG-UXL: Ultra XL Balanced Vertical Slider Glide - Max Glass thickness 10.8mm

NTS

AB
DRAWN.

RH
CHECKED.

-
REVISION.



EMAIL: info@clearviewsg.co.uk
TEL: 0114 294 5018